

Modinex

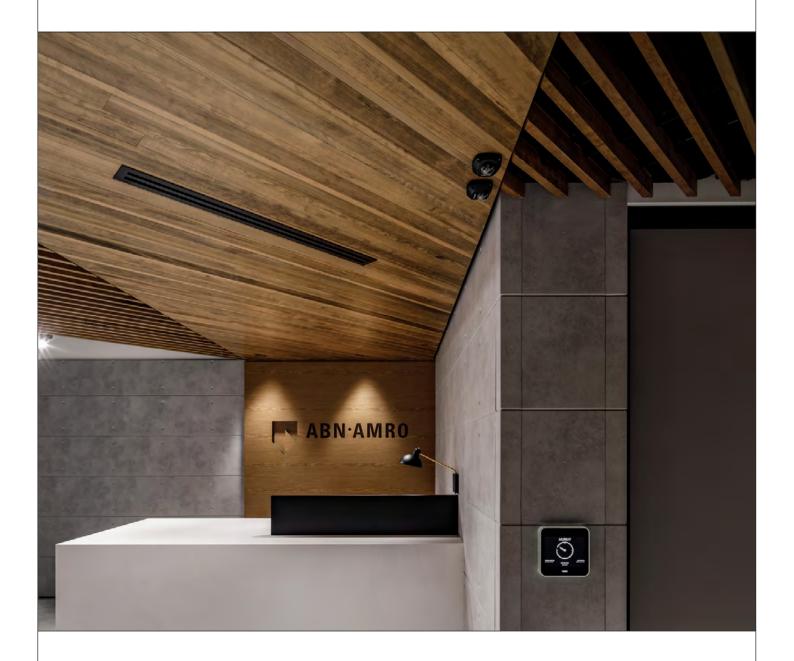

Product Showcase

Austratus Linear - Timber & Austratus Linear DFM (Direct Fix) - Timber

modinex.com.au

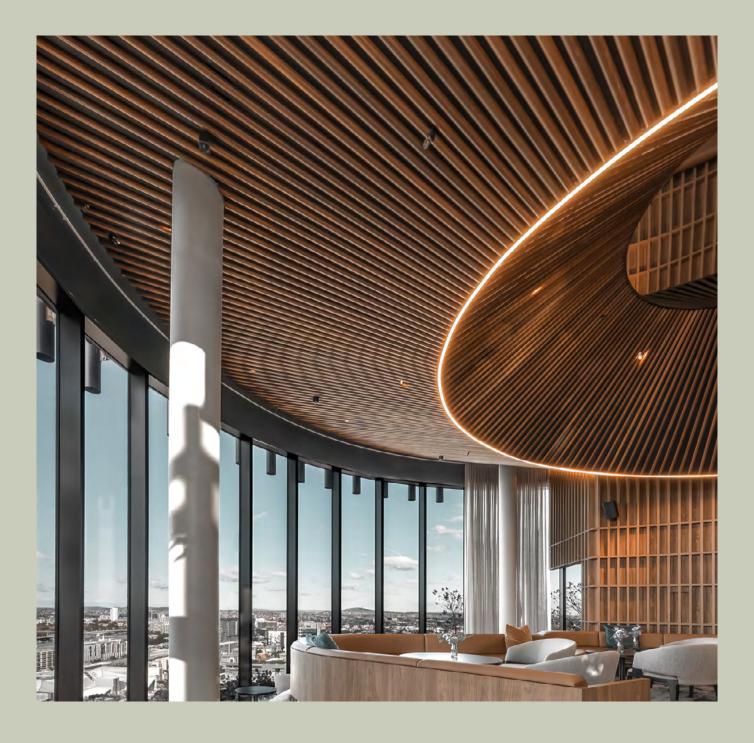

New thinking. New simplicity.

When it comes to inspiring spaces, nothing makes an impact quite like an architectural timber ceiling, wall or screen.

 $\label{lem:colour_condition} Colour, warmth, tone and texture-timber has a unique, sophisticated appeal.$

However, the associated lead times, as well as the need for expert-installation skills, has traditionally rendered genuine timber statements out of reach for many commercial and residential projects ...until now.

Introducing Austratus, a new product innovation from architectural timber specialists, Modinex.





The simplicity and convenience of the Austratus patented system

Our patented fitting system allows continuous lengths of timber to be simply and easily clipped into a suspended ceiling. It can also be screwed directly onto existing walls and ceilings.

Fit-out companies, builders and architects will agree, Austratus makes it easy to achieve brilliant results. How?


Features and Benefits

Acoustic — Up to 0.9NCR acoustic rated insulation available

Fire rating — Group 1 fire rated

Sustainability — Profiles are available in a large range of sustainable timber species or in aluminium (Green or Super Green to reduce CO2 emission by 50-75%)

Application — Suitable for out of weather or external use

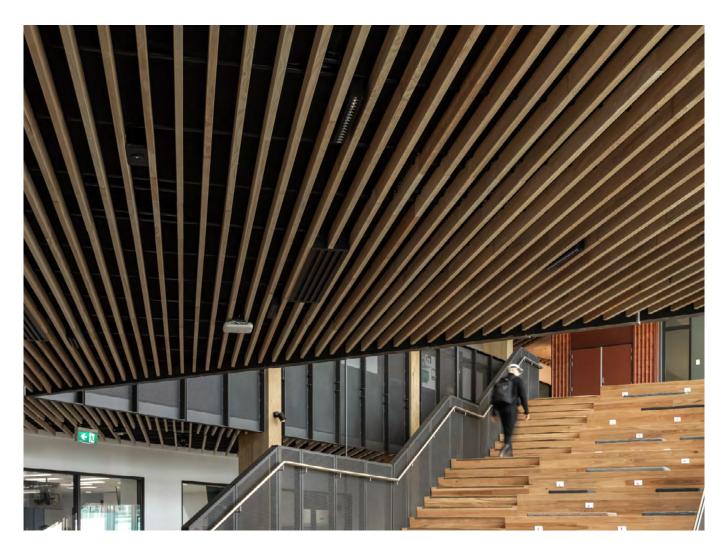




Profiles

30mm Fin series

30mm, 40mm, 60mm, 90mm, 140mm and 190mm depth available




30mm V Fin

60mm depth available



40mm, 60mm and 90mm depth available




Flat series

29mm, 40mm, 60mm and 90mm wide available



40mm Fin series


40mm, 60mm, 90mm, 140mm and 190mm depth available



42mm Peak series

40mm, 60mm and 90mm wide available





Dowel series


32mm, 40mm and 60mm width available



Fixing System

Austratus Linear


*Ideal for when the battens are suspended, or acoustic insulation is required.





Austratus Linear DFM (Direct Fix)

*Ideal when the battens are not suspension or acoustic insulation is needed. No visible rails



Timber Species

All our ranges of timber species are available in set length and random length. Please contact our projects team for more information.

- SOFTWOOD

Western Red Cedar, Alaskan Cedar & Hemlock are the only suitable species for 9mm thick profiles. All Softwood species can be used for 12mm thickness or greater. For external applications, please use 18mm thick profiles or greater.



Western Red Cedar
Plantation
100% PEFC Certified
Greentag Certified



Western Red Cedar - Tight Knot
Plantation
100% PEFC Certified



Hemlock
Plantation
100% PEFC Certified
Suitable for indoor and
out-of weather use only



Plantation 100% PEFC Certified



Alaskan Cedar
Plantation
100% PEFC Certified



Accoya
Plantation
100% PEFC Certified

- HARDWOOD

Hardwood species can be used for 15mm thickness or greater for out of weather applications and 18mm thickness or greater for external use.



American Oak
PEFC Certification is available



Blackbutt
FSC Certification is available



FSC Certification is available



FSC Certification is available




Southern Spotted

PEFC Certification is available



French Oak
PEFC Certification is available

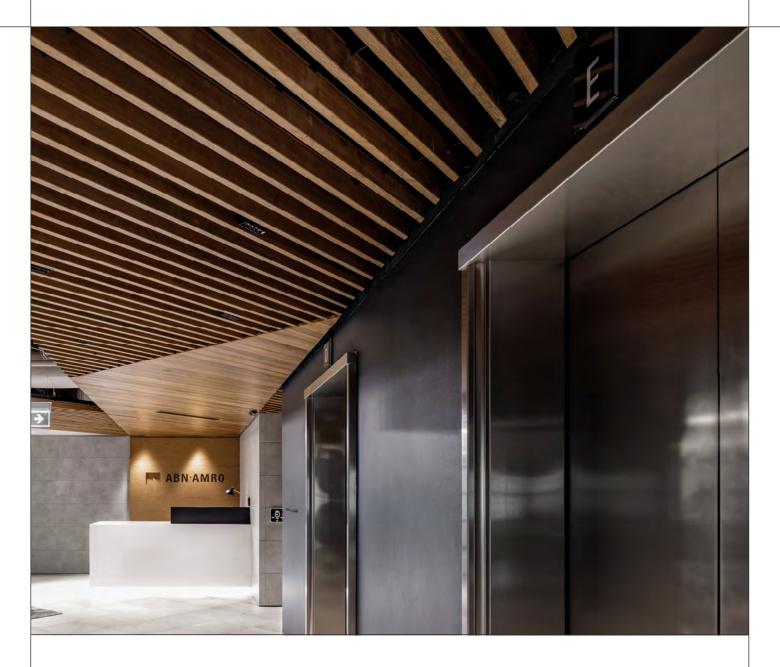

Create stunning wow factor with flexibility of style, texture, colour, shape and species.

Talk with our design team today about how to maximise the grandeur of your space. Our extensive product range puts a wealth of inspiration at your fingertips. We can even collaborate with you to innovate custom solutions, specifically designed to bring your vision to life and elevate your space with exclusive designer appeal.



Let us help you specify your next project

Contact P—1800 156 455 E—hello@modinex.com.au

Learn more

Inspiration and product downloads available at **modinex.com.au**

